

SWITCHGEAR FIBERGLASS BOX PAD REQUIREMENTS

(FOR SERIES 45, 11F, 52F, 53F & 64F SWITCHES)

REVISION: Updated Format & Relocated From UGS-012


CHECKED BY
 (ENGINEERING): JRS

DATE: 12/03/18

CHECKED BY
 (FIELD): JH

APPROVED BY: *Stephen E. Saford*

PREPARED
 BY: SJR

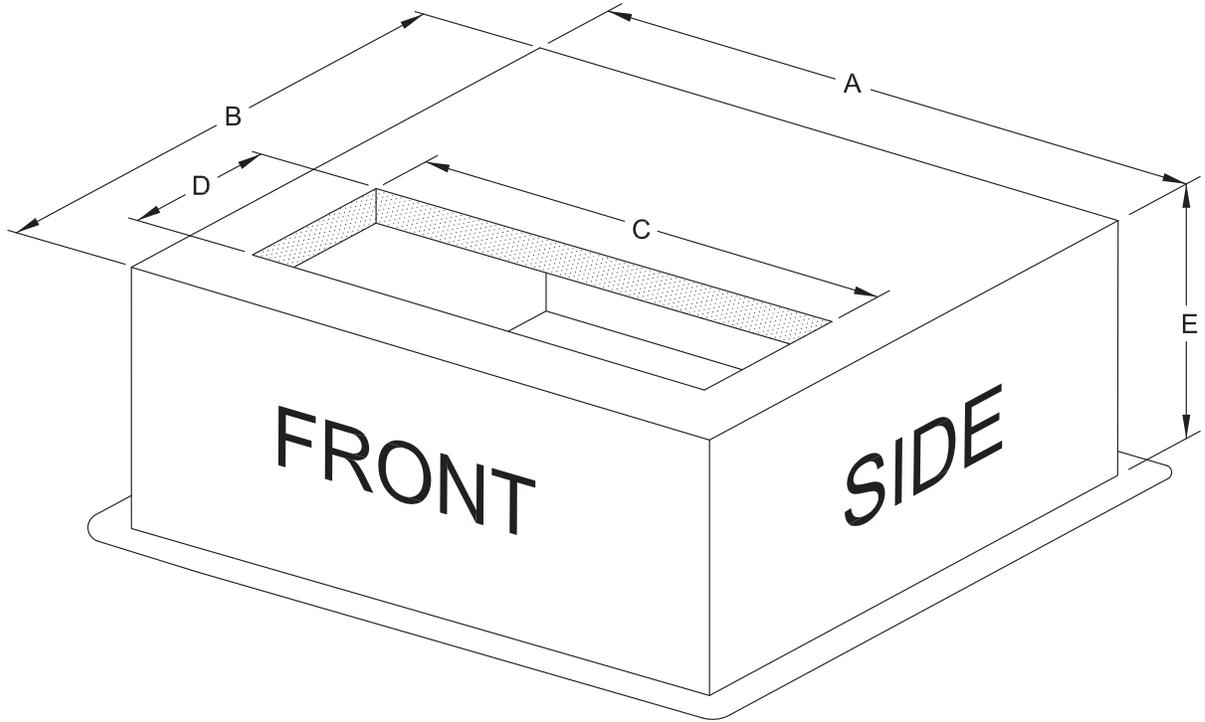

| Fiberglass Switch Box for Series 45 & 64F | | | | | | | |
|---|--------------------------|---------------------|-----|---------|---------|-----|---------------|
| Manufacturer | Manufacturer Catalog No. | Dimensions (Inches) | | | | | RPU Stock No. |
| | | A | B | C | D | E | |
| Electrimold | EFBS-569536-1676-300 | 95" | 56" | 75-5/8" | 15-3/4" | 36" | 25274 |

| Fiberglass Switch Box for Series 11F, 52F & 53F | | | | | | | |
|---|--------------------------|---------------------|-----|---------|---------|-----|---------------|
| Manufacturer | Manufacturer Catalog No. | Dimensions (Inches) | | | | | RPU Stock No. |
| | | A | B | C | D | E | |
| Electrimold | EFBS-568036-1664-300 | 80" | 56" | 63-5/8" | 15-3/4" | 36" | 25272 |
| New Basis | 5680/36 | | | | | | |

* Items shaded have smaller cable access opening (Dim "C"); modern Switchgear Cabinets Sizes for 11F, 52F & 53F have been revised to have larger cable access of 75-5/8 (same size opening as 64F)". If maintaining existing Switchgear or Fiberglass Sleeve Installation verify item to be replaced will be compatible with existing infrastructure.

Notes:

1. Acceptable fiberglass box pads are listed above.
2. See UGS-661 for installation details.
3. The compartment of the switchgear to be to the front of the box pad.
4. The termination sections of the switchgear is to be placed above dimension "A" surface.

