

STRAIGHT RUN



90 DEGREE TURN



180 DEGREE TURN



INTERSECTING RAMPS

INTERMEDIATE LANDINGS at RAMPS

RAMP CONFIGURATION	LANDING LENGTH (L)	LANDING WIDTH (W)	NOTES
STRAIGHT RUN	5'-0" min.	4'-0" min.	1, 2, 3, 4
90 DEGREE TURN	6'-0" min.	5'-0" min.	1, 2, 3
180 DEGREE TURN	6'-0" min.	8'-0" min.	1, 2, 3
INTERSECTING	6'-0" min.	———	1, 2, 3

NOTES:

1 HANDRAILS AND GUARDRAILS HAVE BEEN OMITTED FOR CLARITY.

2 LANDINGS AT EXTERIOR LOCATIONS MAY HAVE UP TO A 1/4" per FOOT (2 percent) SLOPE IN ANY DIRECTION.

3 FOR ENCROACHMENT OF DOORS ONTO LANDINGS, SEE DETAIL "B".

4 A CHANGE OF DIRECTION NOT EXCEEDING 30 DEGREES IS CONSIDERED A STRAIGHT RUN.

INTERMEDIATE LANDINGS at RAMPS

A

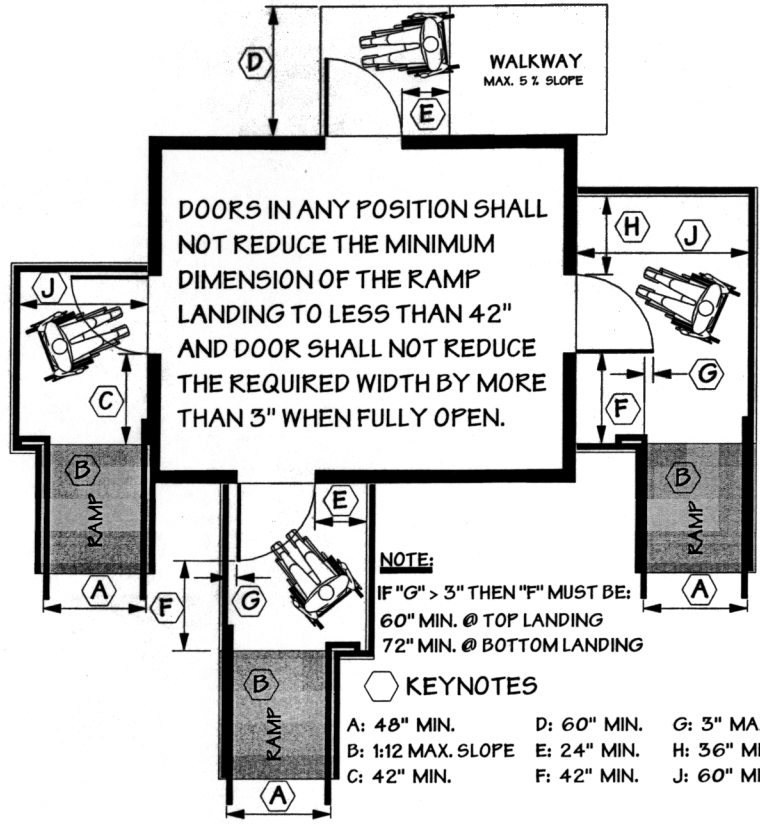

ENCROACHMENT OF DOORS ONTO LANDINGS

B

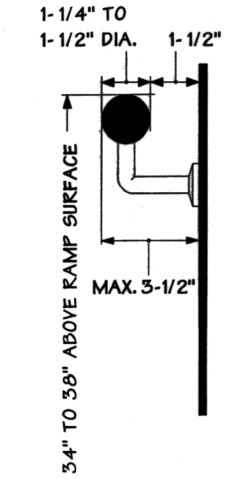

MINIMUM HANDRAIL REQUIREMENTS

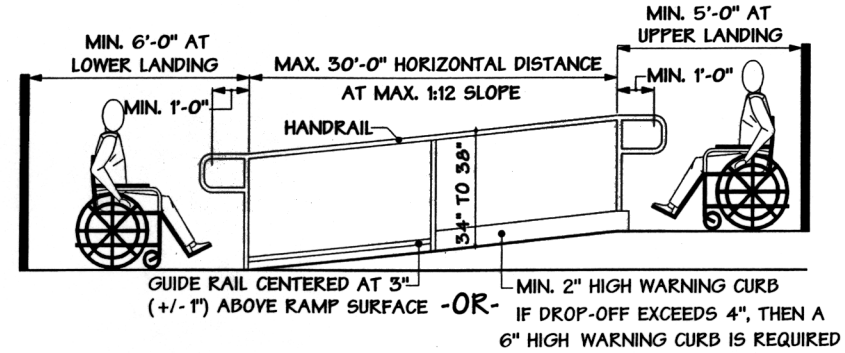



HANDRAIL and GUARDRAIL REQUIREMENTS

C

City of Riverside
Building & Safety Division
DISABLED ACCESS STANDARDS

SCALE NONE

PGH 6/02
DRAWN DATE

REV.	DATE	APPR.
1		
2		
3		
4		
5		

ACCESSIBLE RAMPS & LANDINGS

RDA - 2.0

SHEET