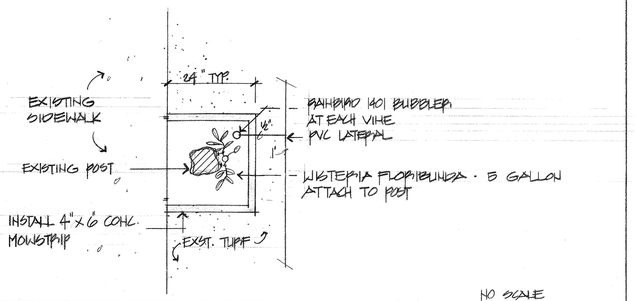

NO SCALE

VINE PLANTING - ADDITIVE ITEM

IRRIGATION LEGEND

SYMBOL	MANUFACTURER / MODEL #	GPM	PSI	RAD.	REMARKS
○	TORO 53000	2.8	25	41'	2.8 NOZZLE
D	BUCKNER 13050-71	1.5	15	11'	MOUNT ON #13070 POP RISER
D	" " 13050-73	.7	15	11'	BUCKNER ↓
D	" " 13240-71	1.4	↓	↓	MOUNT ON 12" POP RISER #13012
D	" " 13240-73	.8	↓	↓	BUCKNER ↓
◐	REMOTE VALVE EPS & EPS-CP				SIZES AS NOTED ON PLAN
◐	REMOTE 3310 LVC				QUICK COUPLER VALVE
⬢	RAINBIRD PVB150 BACKFLOW 1½"				INSTALL PER DETAIL & MFGR. GUIDES
◪	REMOTE CLOCK # RC-1250				MOUNT INSIDE EXISTING BLG.
⋈	BRASS GATE VALVE				LINE SIZED
○	EXIST'G DRINKING FOUNTAIN				REMOVE & TURN OVER TO CITY OF RIVERSIDE - SEE NOTES
═══	CLASS 315 PVC MAINLINE SCH. 40 PVC PER SPECS.				
———	CLASS 200 PVC LATERAL				

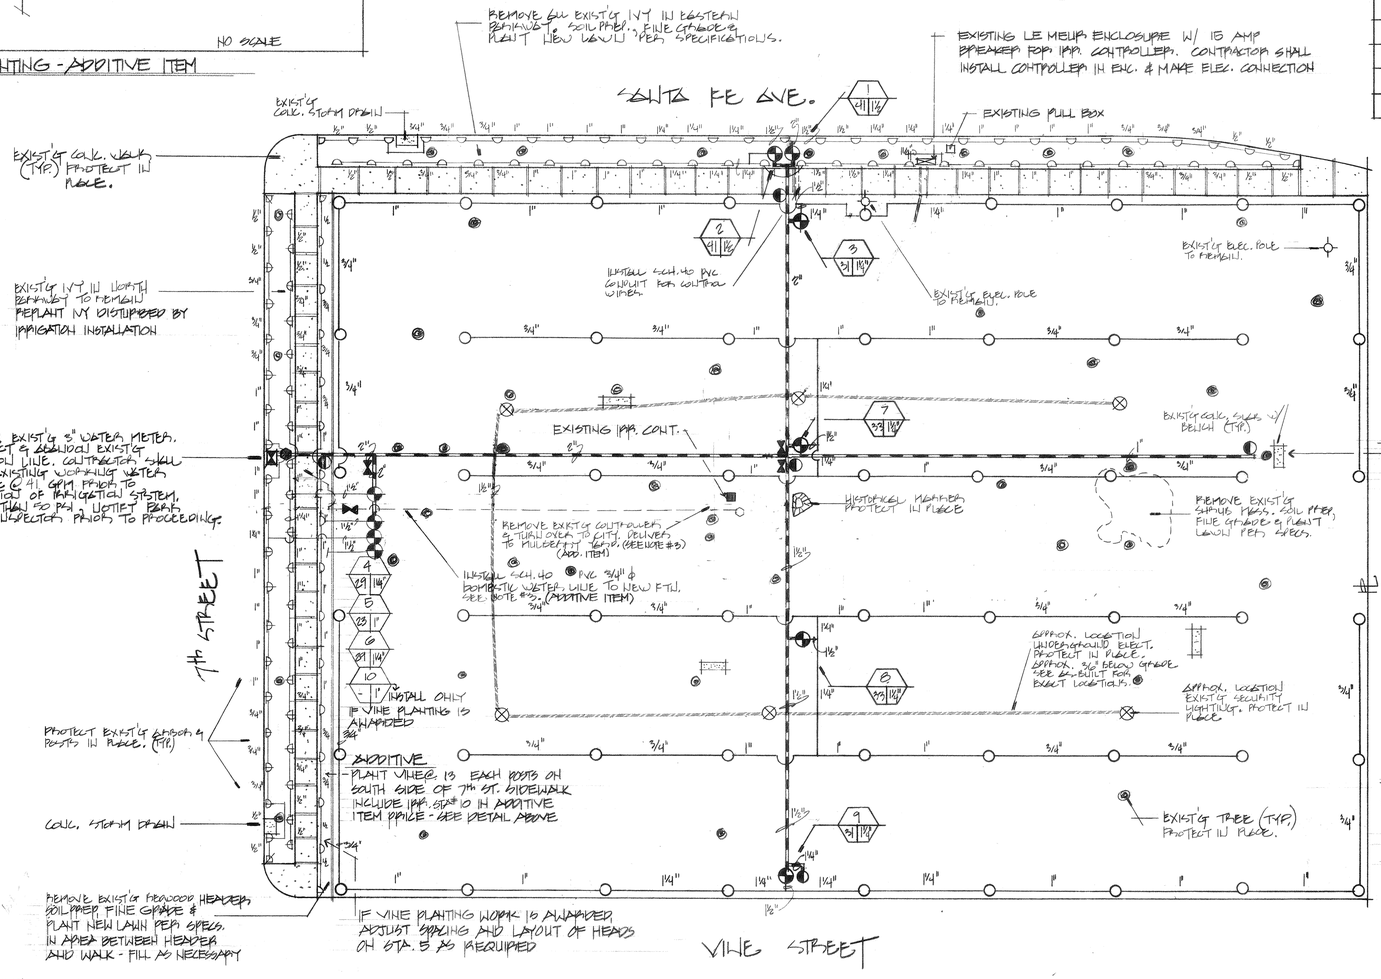

ADDITIVE ITEM

REMOVE EXISTING BENCHES (4 EA.) AND CONCRETE SLAB. INSTALL NEW BENCHES (4 EA.) PER DETAIL IN SPECIFICATIONS -



ADDITIVE ITEM

RENOVATE TURF ENTIRE PARK - MOW, AERATE (TO A MIN. DEPTH OF 3"), FILL LOW SPOTS, FERTILIZE W/ 300 LBS. GRO-POWER PLUS PER 1,000 SQ. FT., OVERSEED (6 LBS PER 1,000 SQ. FT.) TOPDRESS AND MAINTAIN FOR 90 CALENDAR DAYS.

NOTES:

1. CONTRACTOR SHALL SALVAGE ALL EXIST'G VALVES, SPRINKLERS, HEADS, HYDRAULIC CONTROLLER, VALVE BOXES & HOSE BIBBS. DELIVER TO CITY MULBERRY YARD PRIOR TO FINAL ACCEPTABLE OF JOB.
2. TREE LOCATIONS ARE APPROXIMATE.
3. REMOVE EXIST'G FOUNTAIN, SALVAGE & DELIVER TO CITY MULBERRY YARD. INSTALL NEW FOUNTAIN PER DETAIL. INSTALL NEW SERVICE LINE BACK TO METER. P.O.C. UPSTREAM OF IRRIGATION BACK-FLOW PREVENTER. (ADDITIVE ITEM)
4. ALL ITEMS NOT DESIGNATED FOR REMOVAL SHALL BE PROTECTED IN PLACE BY THE CONTRACTOR. ALL DAMAGE CAUSED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED BY THE CONTRACTOR AT NO COST TO THE CITY.
5. RESEED ALL TURF AREAS DISTURBED BY THE WORK OF THIS CONTRACT.
6. TURF SEEDING MAY BE ACCOMPLISHED BY HYDROSEEDING OR BY HAND SEEDING
7. TRIM 27 HARDWOOD TREES. RAISE TO 12' AND THIN AS DIRECTED BY SPECS. (ADDITIVE BID ITEM)

APPROVALS

PARK & RECREATION DIRECTOR	4/4/84 DATE
PARK SUPERINTENDENT	4/4/84 DATE
PARK PROJECTS COORDINATOR	3-30-84 DATE

NORTH
SCALE: 1"=20'

NORTH PARK
Irrigation Plan

city of riverside
park & recreation
department
(714) 787-7923
3900 MAIN ST RIVERSIDE, CALIFORNIA 92522

revisions	by

date	MARCH 1984
design	M.E.
drawn	M.E.
check	
acct. no.	01-592-4492

SHEET 1 of 2

P-0960