GENERAL PLANTING NOTES

1) Contact the Street Tree Inspector at 351-6126 two working days (48 hours) prior to installing any plant material.

2) Trees planted in turf areas shall be maintained with a minimum 12" radius around the tree free of turf throughout the maintenance period.

3) Watering basins may be removed after the maintenance period.

4) For staking information as applicable, refer to Standard Detail 1002.

5) For guying information as applicable, refer to Standard Detail 1003.

6) For specification information, refer to City of Riverside Park and Recreation Department Standard Specifications, Section 02480 Planting.

7) Provide Fertilizer Tablets as follows:

1 gallon plant	2 tablets
5 gallon plant	3 tablets
15 gallon plant	5 tablets
24" box plant	8 tablets

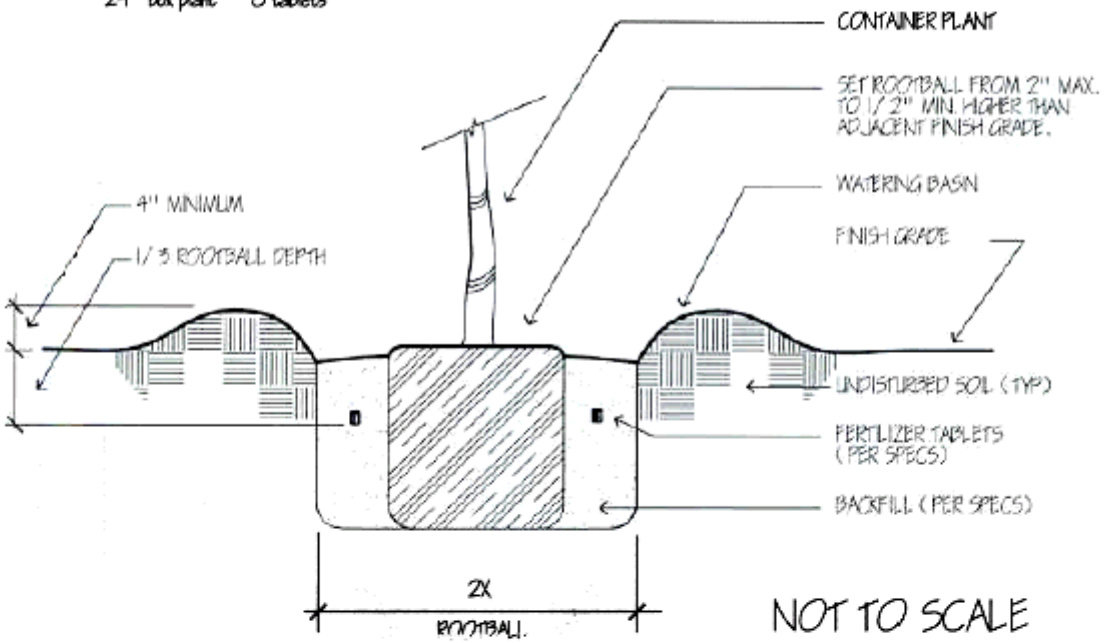

NOT TO SCALE

Approved	Date
BJ	04/18/96
Revised	Date

Park and Recreation Department
CITY OF RIVERSIDE

PLANTING DETAIL

Detail No.
1001