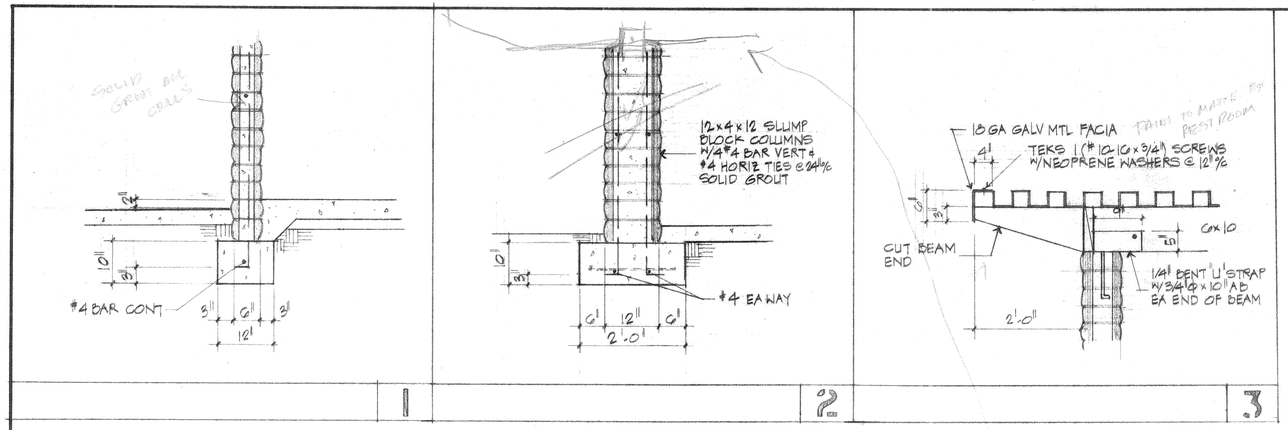

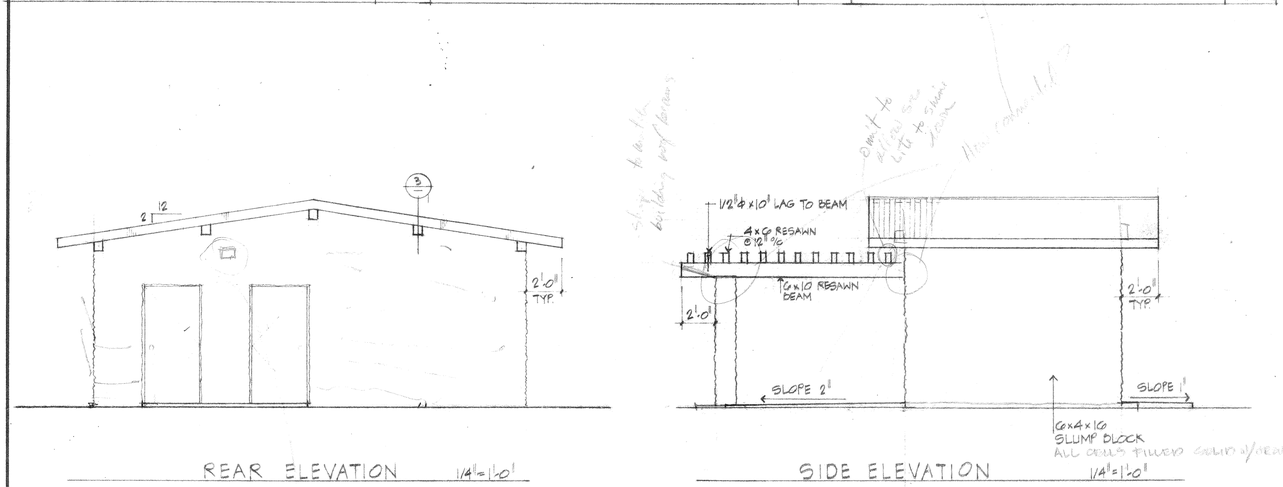

REAR ELEVATION 1/4"=1'-0"

SIDE ELEVATION 1/4"=1'-0"

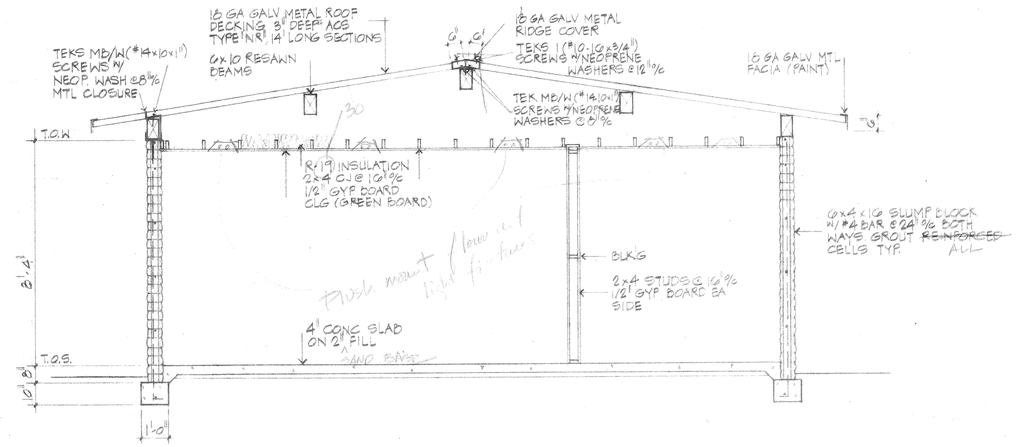

SECTION A 3/8"=1'-0"

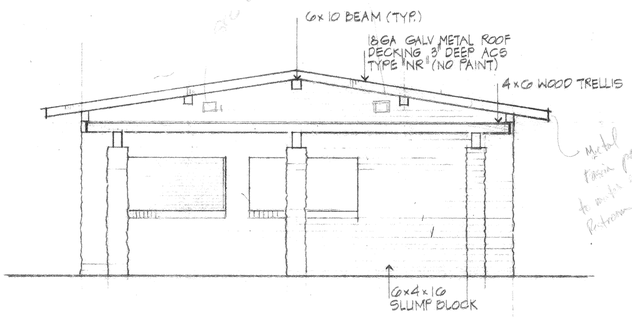

FRONT ELEVATION 1/4"=1'-0"

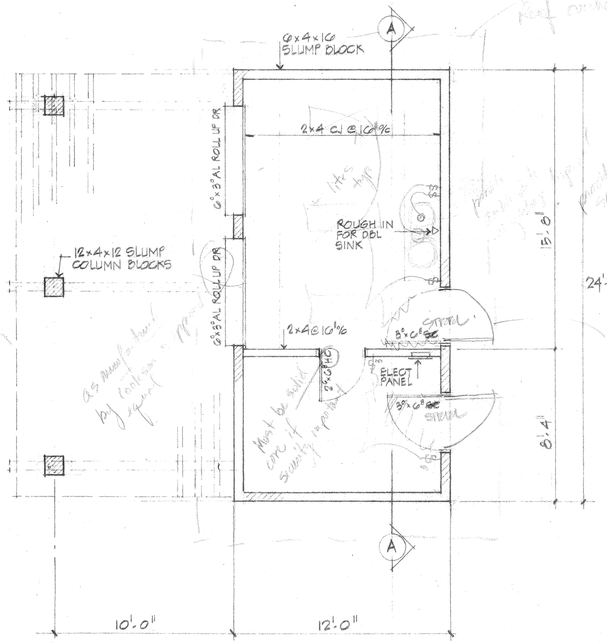

FLOOR PLAN 1/4"=1'-0"

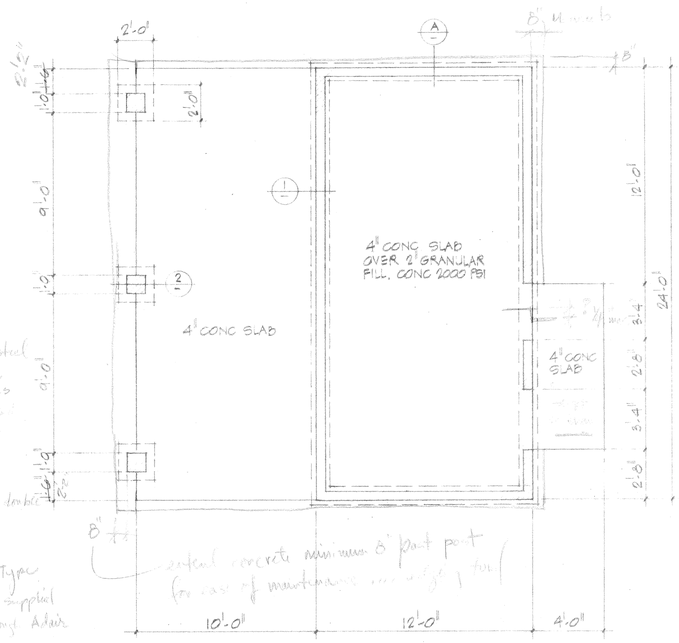

FOUNDATION PLAN 1/4"=1'-0"

reverse doors to swing out to reduce risk of battering in... steel doors to be 1 3/4" Thick 18 gauge with 15 gauge vertical internal stiffeners spaced 6" apart spot welded to one face and projection welded to the opposite sheet. Top & bottom channels 16 gauge vertical edges 14 gauge

Door frames - 14 gauge cells [illegible] double annealed steel

Hinge plates - 10 gauge or heavier

Lock cylinders to be Medico AIR Type

Keyway with 6 Pin cylinder, supplied sub assembled as available through Adair Safe & Lock Riverside, CA.

Hinges to be supplied w/pins & screws

charles brown architect
647 N. MAIN ST. SUITE 1A, RIVERSIDE, CA. 92501, 714 683 6222

MONROE PARK

JOB
DATE
REV

SHEET OF