


Revision

DATE: 2/20/02


REVISION: Added Notes, Standoff dimensions

DATE: 3/8/02

APPROVAL: *Dave Redding*

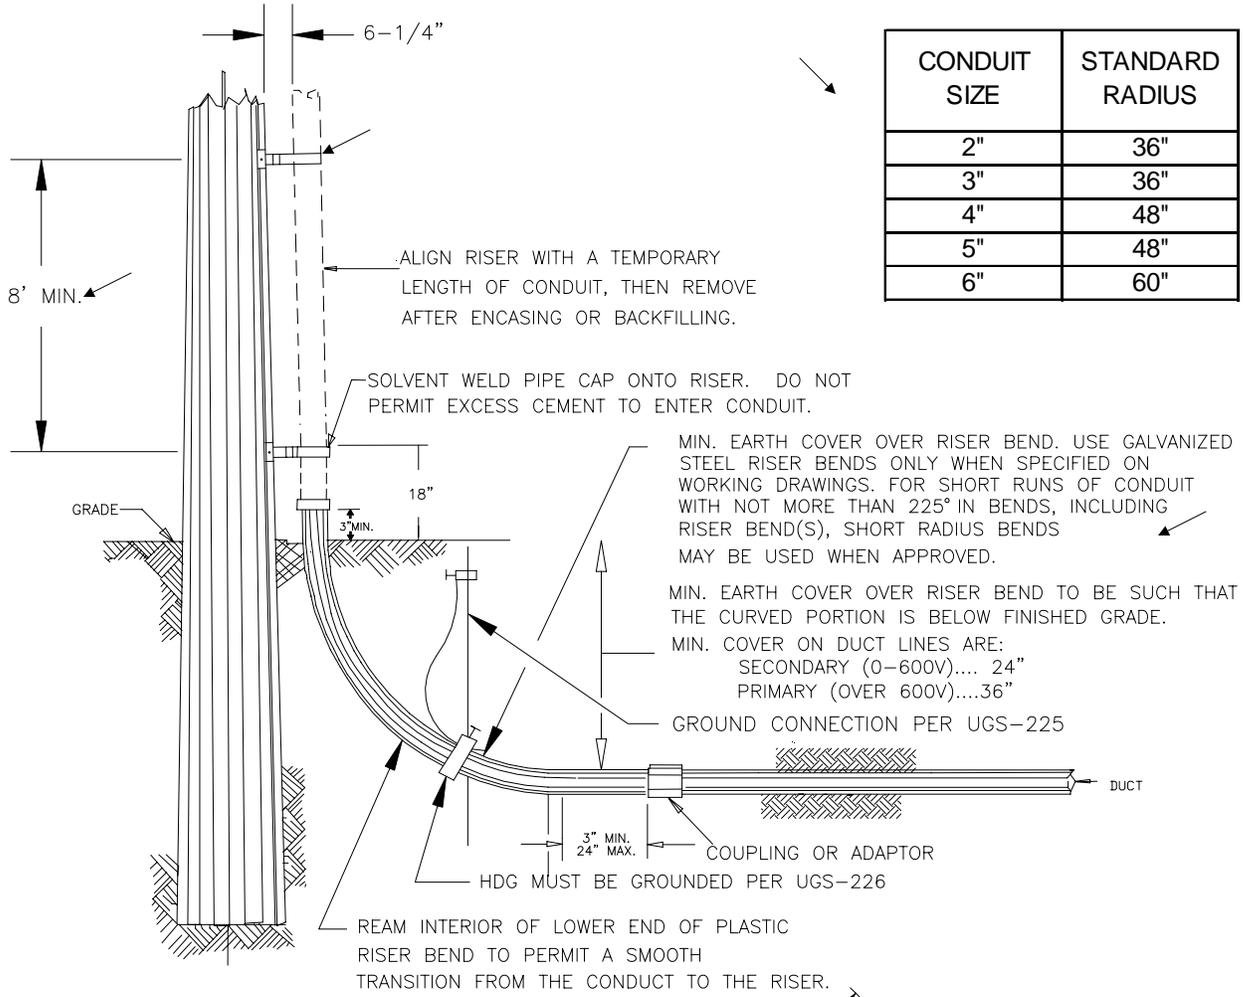

ELEVATION

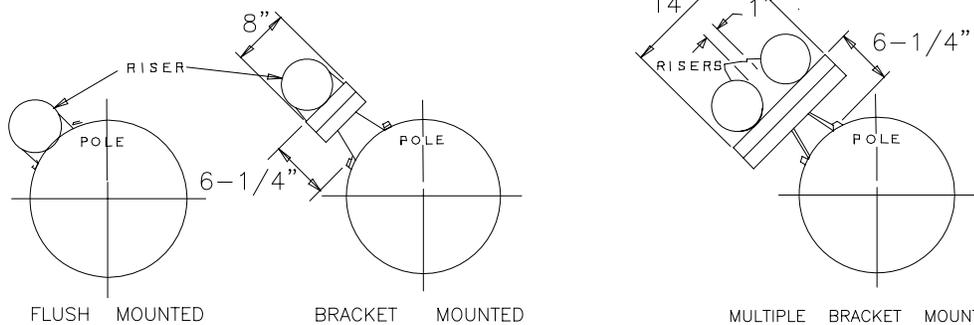

Notes:

- Stand-off brackets are always required for all primary conduits regardless of the size and quantity.
- Stand-off brackets are only specified for secondary or communication conduit risers greater than or equal to 3" and when installing two or more conduit risers.
- Stand-off brackets are not to be installed for streetlight or traffic services regardless of number of conduit risers.
- The second standoff bracket must be 8' above the nearest climbable object to the pole.