



TOP VIEW

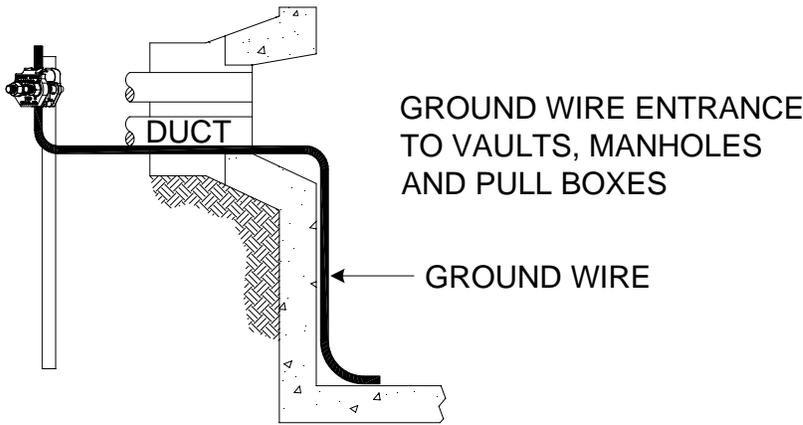

SECTION "BB"

| STRUCTURE | GROUND WIRE |
|-----------|-------------|
| PJC | 1/0 |
| BTE | 1/0 |
| TP | 1/0 |
| PULL BOX | 4/0 |
| SLAB BOX | 4/0 |
| CST | 4/0 |
| MANHOLE | 4/0 |
| VAULT | 4/0 |

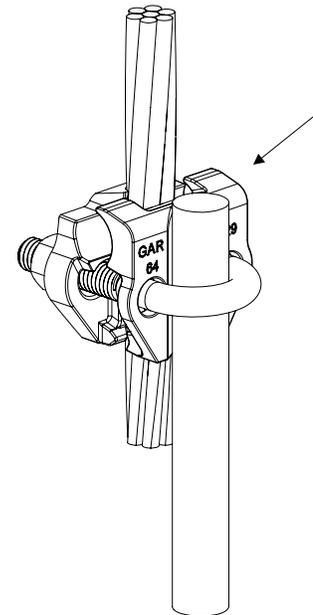

MECHANICAL CONNECTOR
DETAIL

NOTES:

1. At the discretion of the inspector, 60' of 4/0 soft drawn bare copper wire may be installed in the trench bottom in lieu of ground rods if rocky soil interferes with ground rod installation.
2. Leave enough ground wire to wrap the interior perimeter of the structure.
3. Refer to individual standards for ground wire terminator.
4. Mechanical ground connector shall be per Burndy No. GAR 6429 or Department approved equal.