


Revision

DATE: 11/17/06

REVISION: Obsolete

DATE: 12/11/06

APPROVAL: Dave Redding

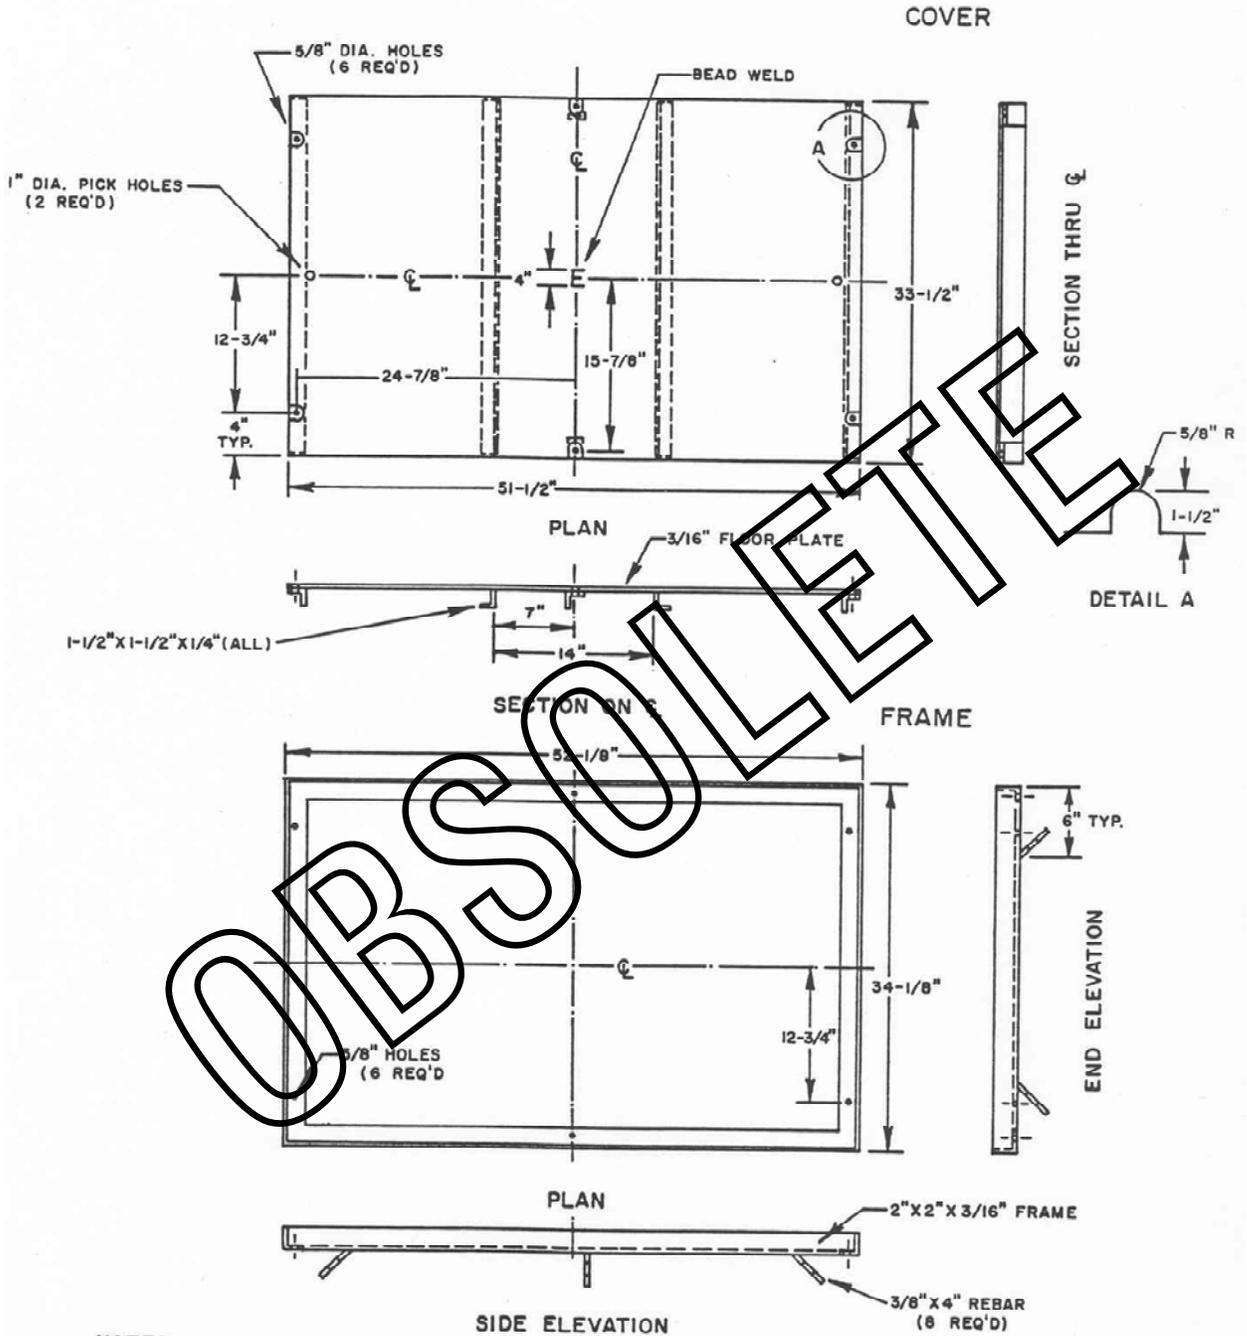

NOTES:

1. Six 1/2" Slotted hex-head stainless steel bolts to be furnished with each cover.
2. Clearance between cover and frame to be 1/8" all around.
3. Cover to be interchangeable.
4. Covers shall be treated, after fabrication, with one coat of subalox no.511 primer and then with one coat of subalox no.510 aluminum paint. Paint of equal quality may be substituted if department approval is obtained.