
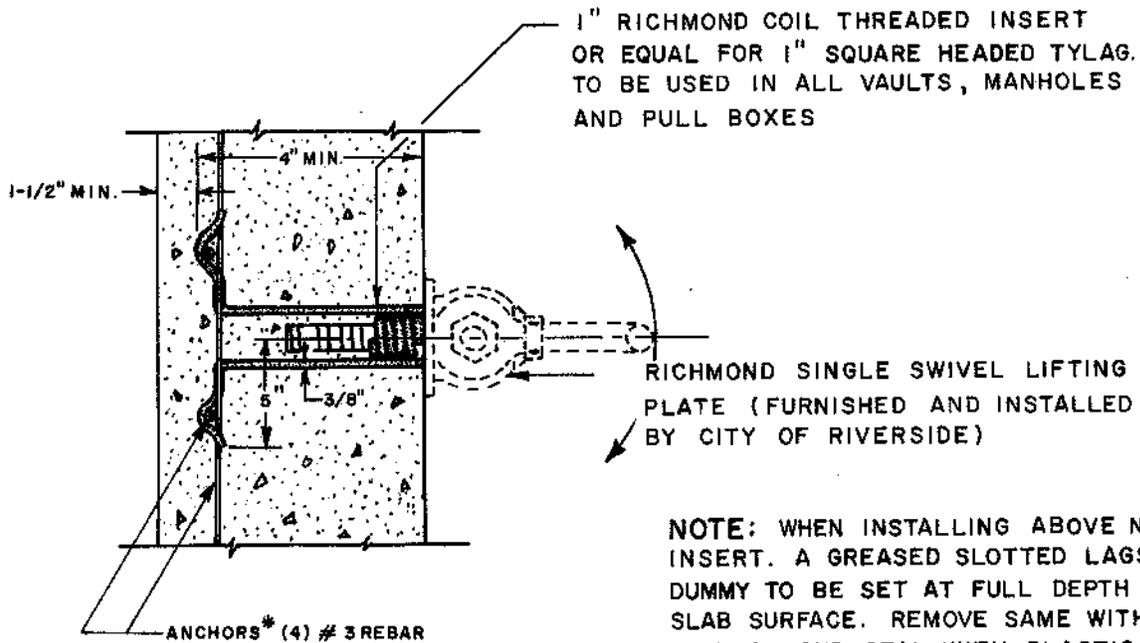


INSERT

STANDARD INSTALLATION

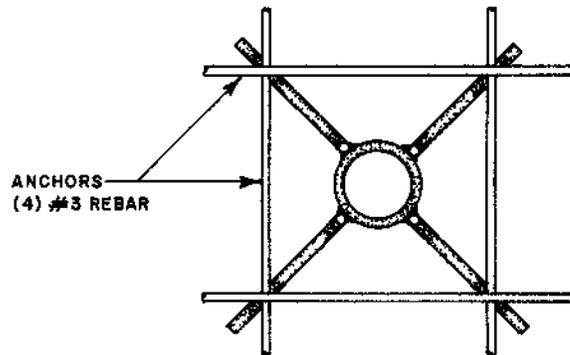

NOTE: WHEN INSTALLING ABOVE NOTED INSERT. A GREASED SLOTTED LAGSTUD DUMMY TO BE SET AT FULL DEPTH FROM SLAB SURFACE. REMOVE SAME WITHIN 24 HRS. AND SEAL WITH PLASTIC CUP. AFTER INSTALLATION INSERT TO BE PACKED WITH A HARD GREASE AND CAPPED WITH A PLASTIC PLUG.

* ANCHOR STEEL TO BE A MINIMUM OF 12" LONG IF NOT INTERLOCKED WITH REINFORCING STEEL. ANCHORS MAY BE SHORTER IF INTERLOCKED. (1" MIN. LAP)

RIVERSIDE PUBLIC UTILITIES DEPT.- UNDERGROUND STRUCTURES