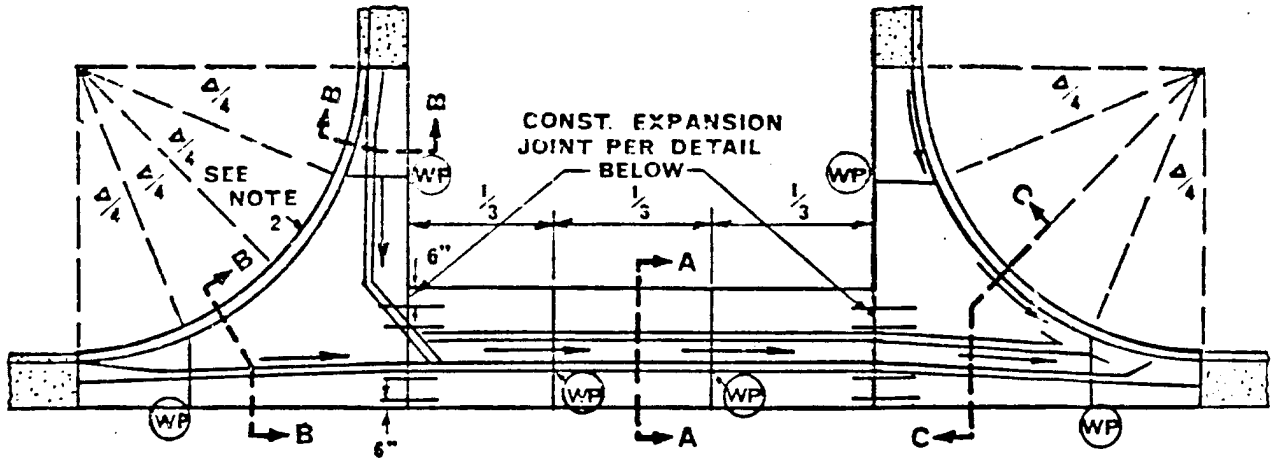

PLAN VIEW

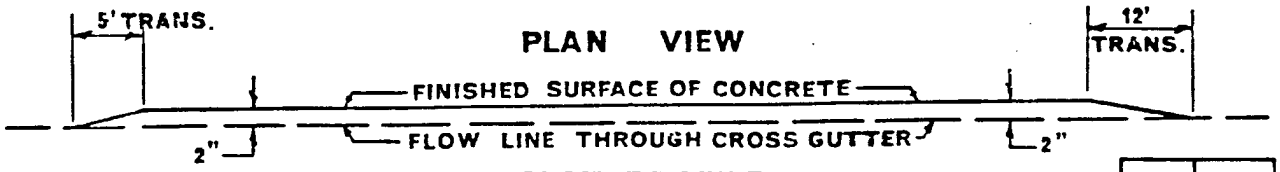

SLOT PROFILE

W	D
6'	3/8"
8'	1/2"
10'	5/8"

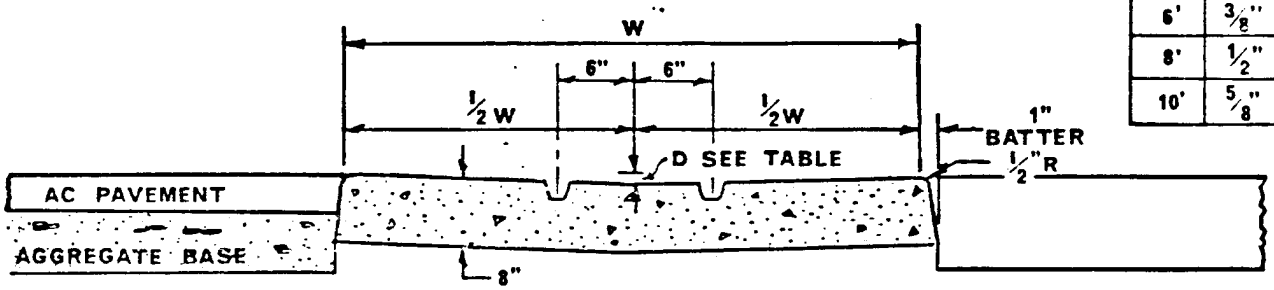

SECTION A-A

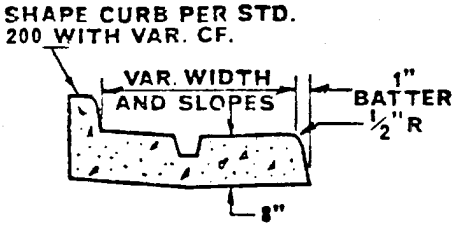

SECTION B-B



SLOT DETAIL

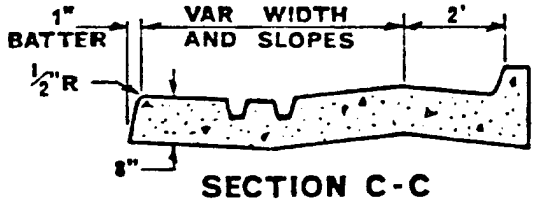

SECTION C-C

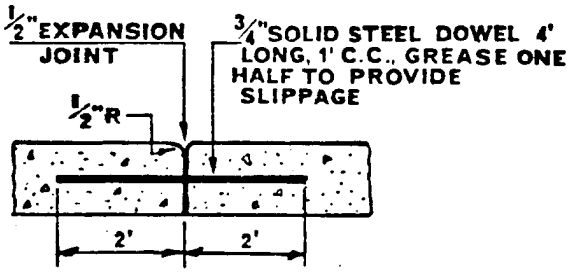

EXPANSION JOINT DETAIL

NOTES:

1. Concrete shall be class 520-C-2500. (1)
2. Reduce CF to insure drainage away from FL on upstream curb return.
3. W shall be 6' unless otherwise specified.
4. Install 1/2" expansion joints at curb returns.
5. Construct weakened plane joints at locations indicated by (WP).

APPROVED [signature] DATE 1-22-73
PUBLIC WORKS DIRECTOR - R.C.E. 8134

MARK	REVISIONS	APPR.	DATE
(1)	revised concrete class	[illegible]	7-13-78

CITY OF RIVERSIDE

PUBLIC WORKS DEPT. - ENGINEERING DIV.

SLOTTED CROSS GUTTER

STANDARD DRAWING NO. 221