| SYMBOL | SIZE | QUAN | DESCRIPTION |
|---|---|---|---|
| X | 6/4 F | 62 | TURBO-JET SPRINKLER - FULL CIR. |
| V | 6/4 PC | 17 | " " " PART CIRCLE |
| ● | 2" | 17 | REMOTE CONTROL VALVES |
| ■ | 12 STA. | 1 | MOODY CONTROLLER |
| T | 2" | 6 | PLUGGED TEE |
| —·· | 2" | | EXIST. GALV. MAIN |
| —·· | 3" | | GALV. MAIN |
| ═══ | SCH. 40 | | P.V.C. PIPE |
| | 3" | 1 | CHECK VALVE 3" |
| | 3" | 1 | GATE VALVE 3" |

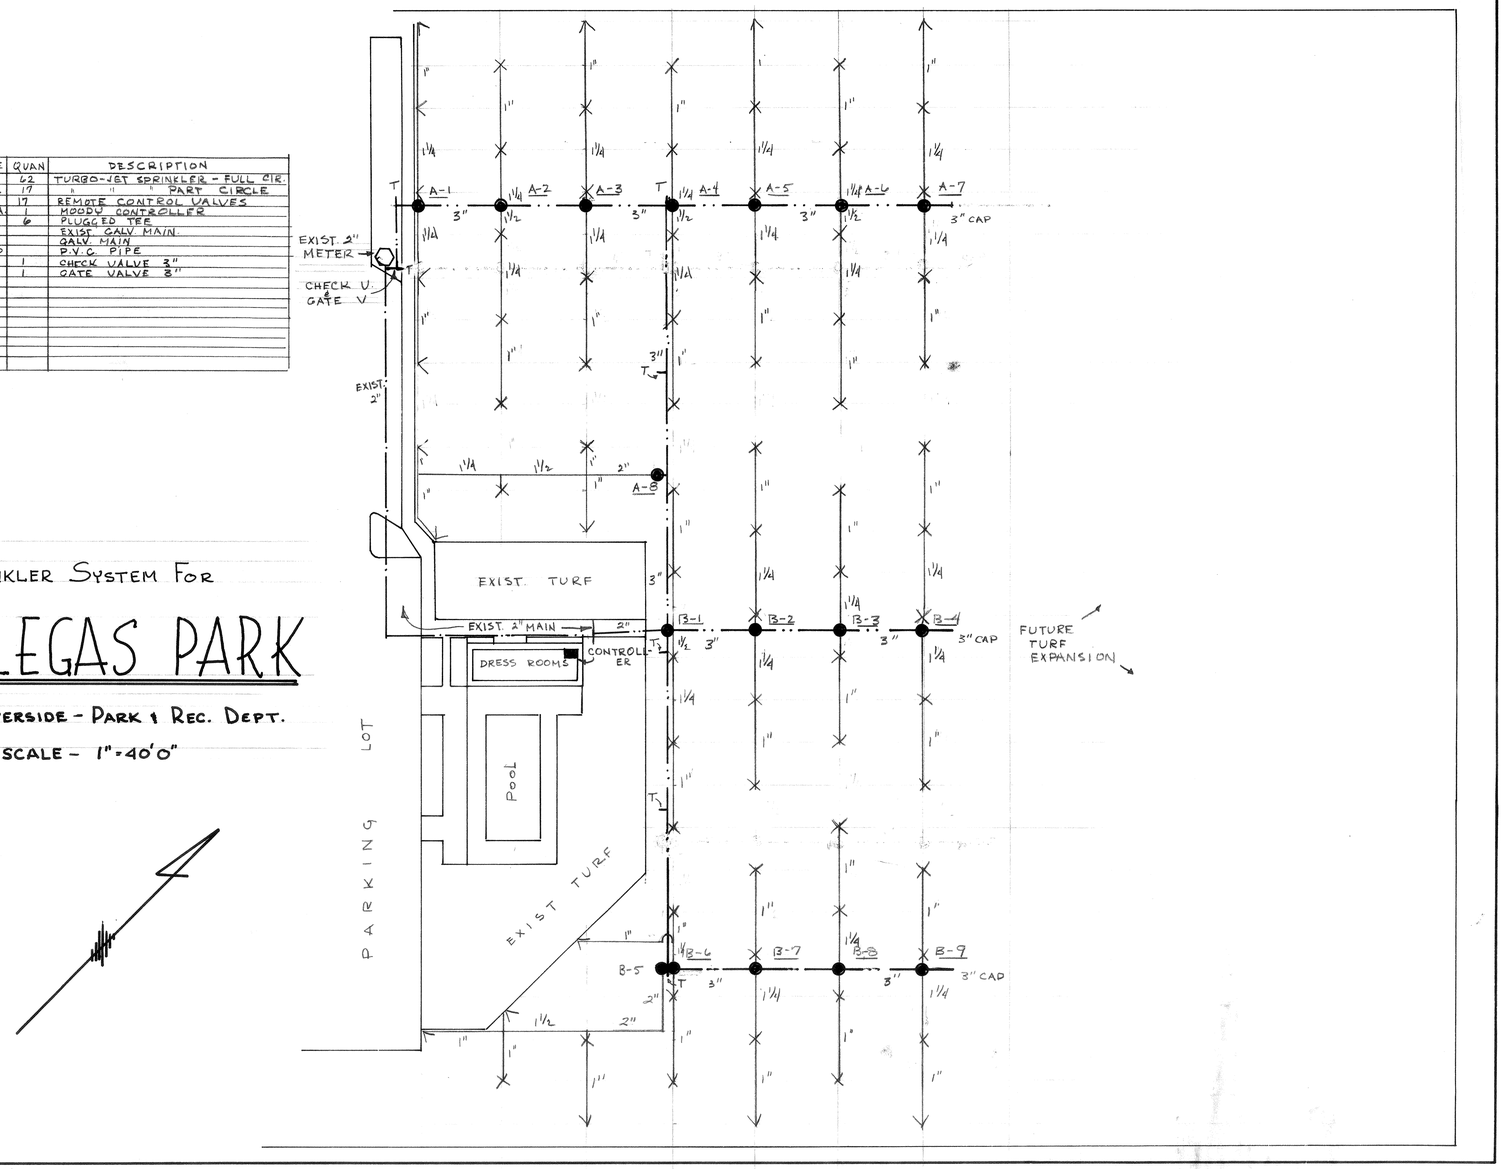


SPRINKLER SYSTEM FOR

# VILLEGAS PARK

CITY OF RIVERSIDE - PARK & REC. DEPT.

SCALE - 1" = 40'0"

DRAWING NUMBER

V1-01

P-159-12

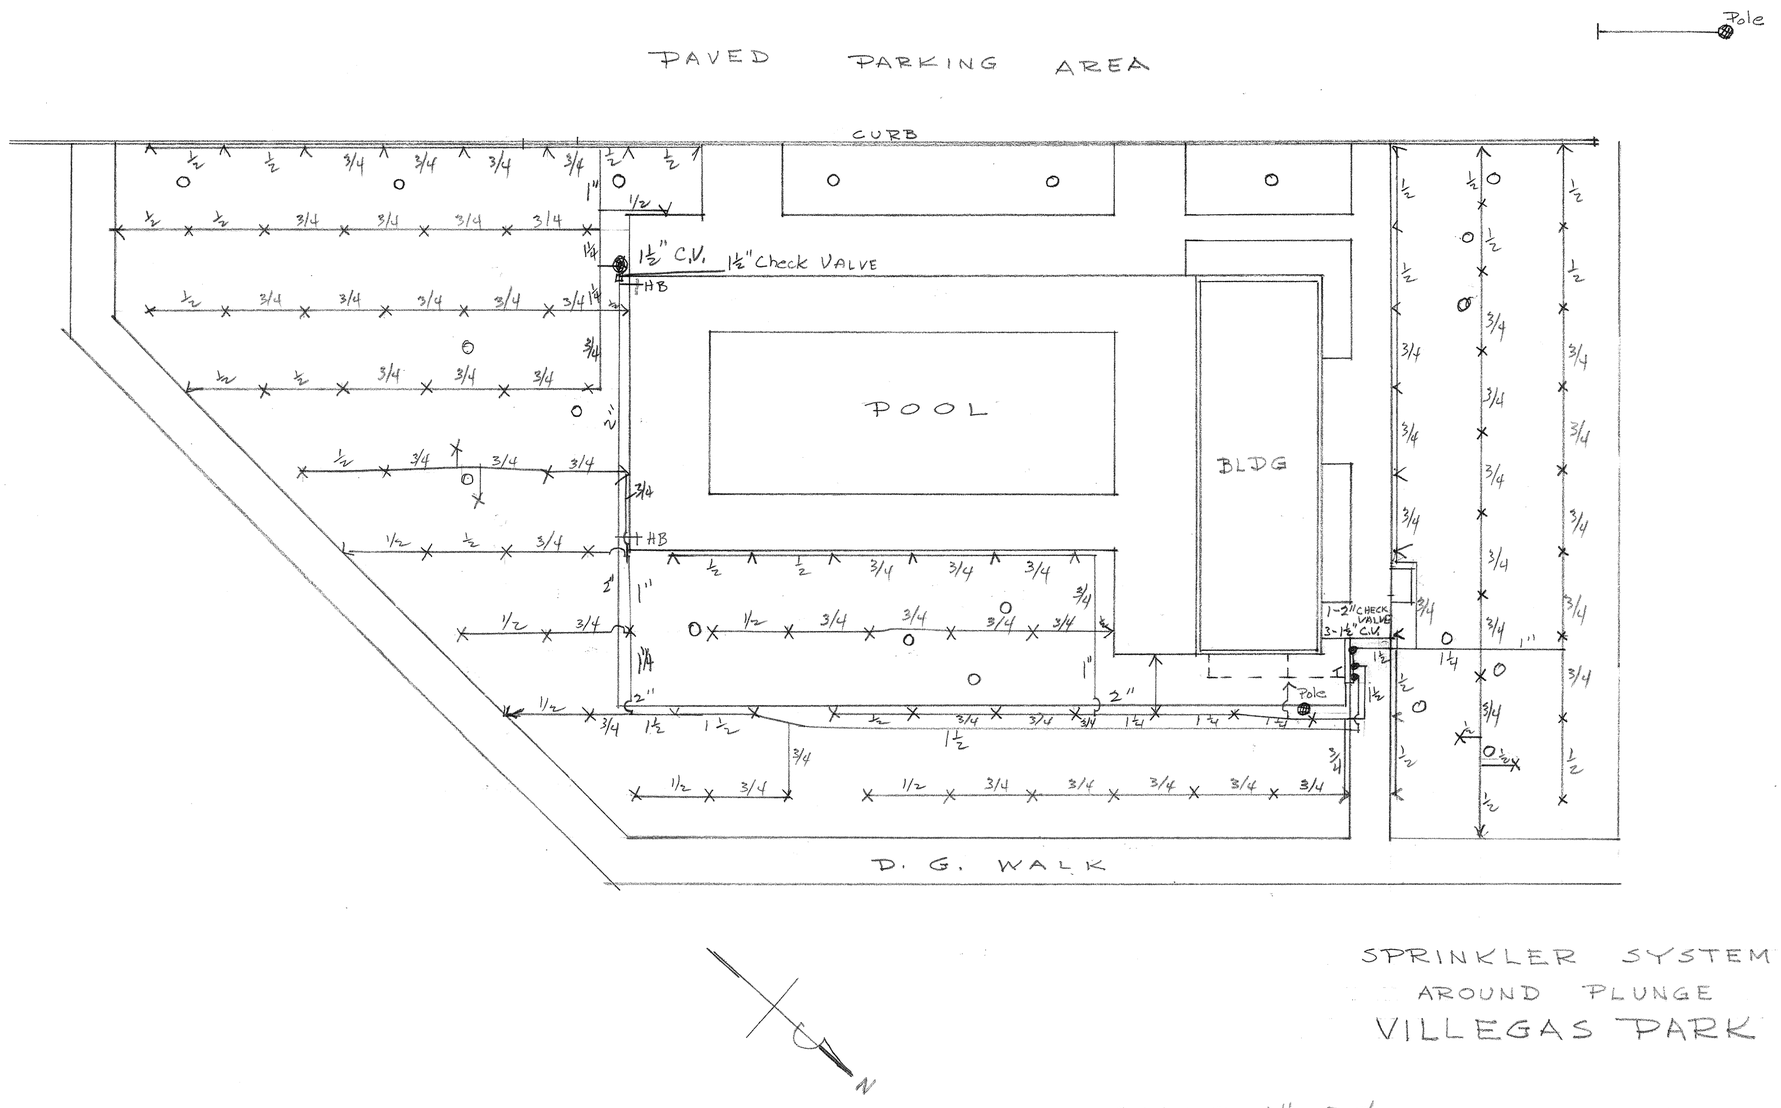


SPRINKLER SYSTEM
AROUND PLUNGE
VILLEGAS PARK

SCALE 1" = 20'

10-2-56
S.P.K.

P-159-2

DRAWING NUMBER
PLAN HOLD CORPORATION • IRVINE, CALIFORNIA
REORDER BY NUMBER U7S4R

DRAWING NUMBER
V1-04
PLAN HOLD CORPORATION • IRVINE, CALIFORNIA
REORDER BY NUMBER U7S4R

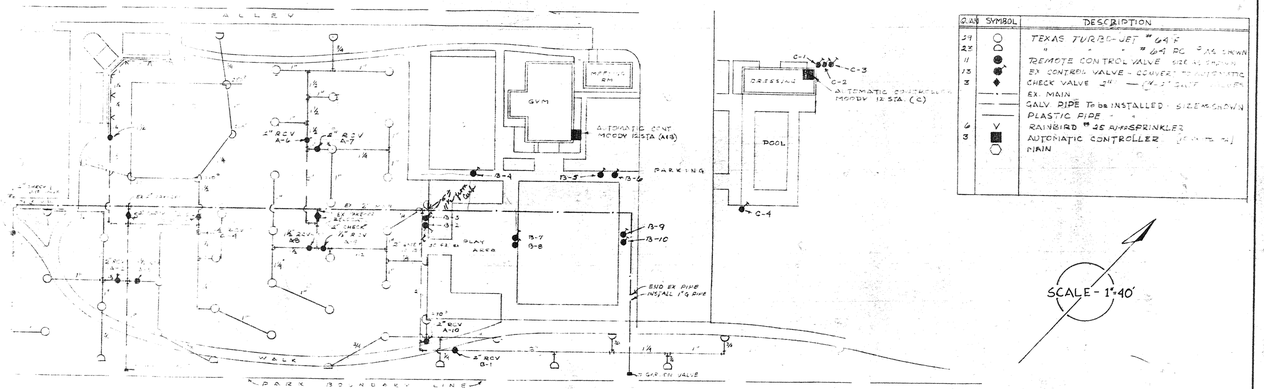


| Q.AN | SYMBOL | DESCRIPTION |
|---|---|---|
| 24 | ○ | TEXAS TURBO-JET #64 F |
| 23 | ⌓ | " " " #64 PC [illegible] |
| 11 | ● | REMOTE CONTROL VALVE [illegible] |
| 13 | ●ˣ | EX CONTROL VALVE - CONVERT TO AUTOMATIC |
| 3 | ◆ | CHECK VALVE 2" — [illegible] |
| | —·— | EX. MAIN |
| | — — | GALV. PIPE TO BE INSTALLED - SIZE AS SHOWN |
| | —— | PLASTIC PIPE " " |
| 6 | V | RAINBIRD #25 PM SPRINKLER |
| 3 | ■ | AUTOMATIC CONTROLLER [illegible] |
| | ○ | MAIN |

SPRINKLER SYSTEM

# VILLEGAS PARK

CITY of RIVERSIDE PARK & RECREATION DEPT

12/23/59

DRAWING NUMBER

PLAN HOLD CORPORATION • IRVINE, CALIFORNIA

REORDER BY NUMBER 075AR

DRAWING NUMBER VI-06

Basketball 90 x 50

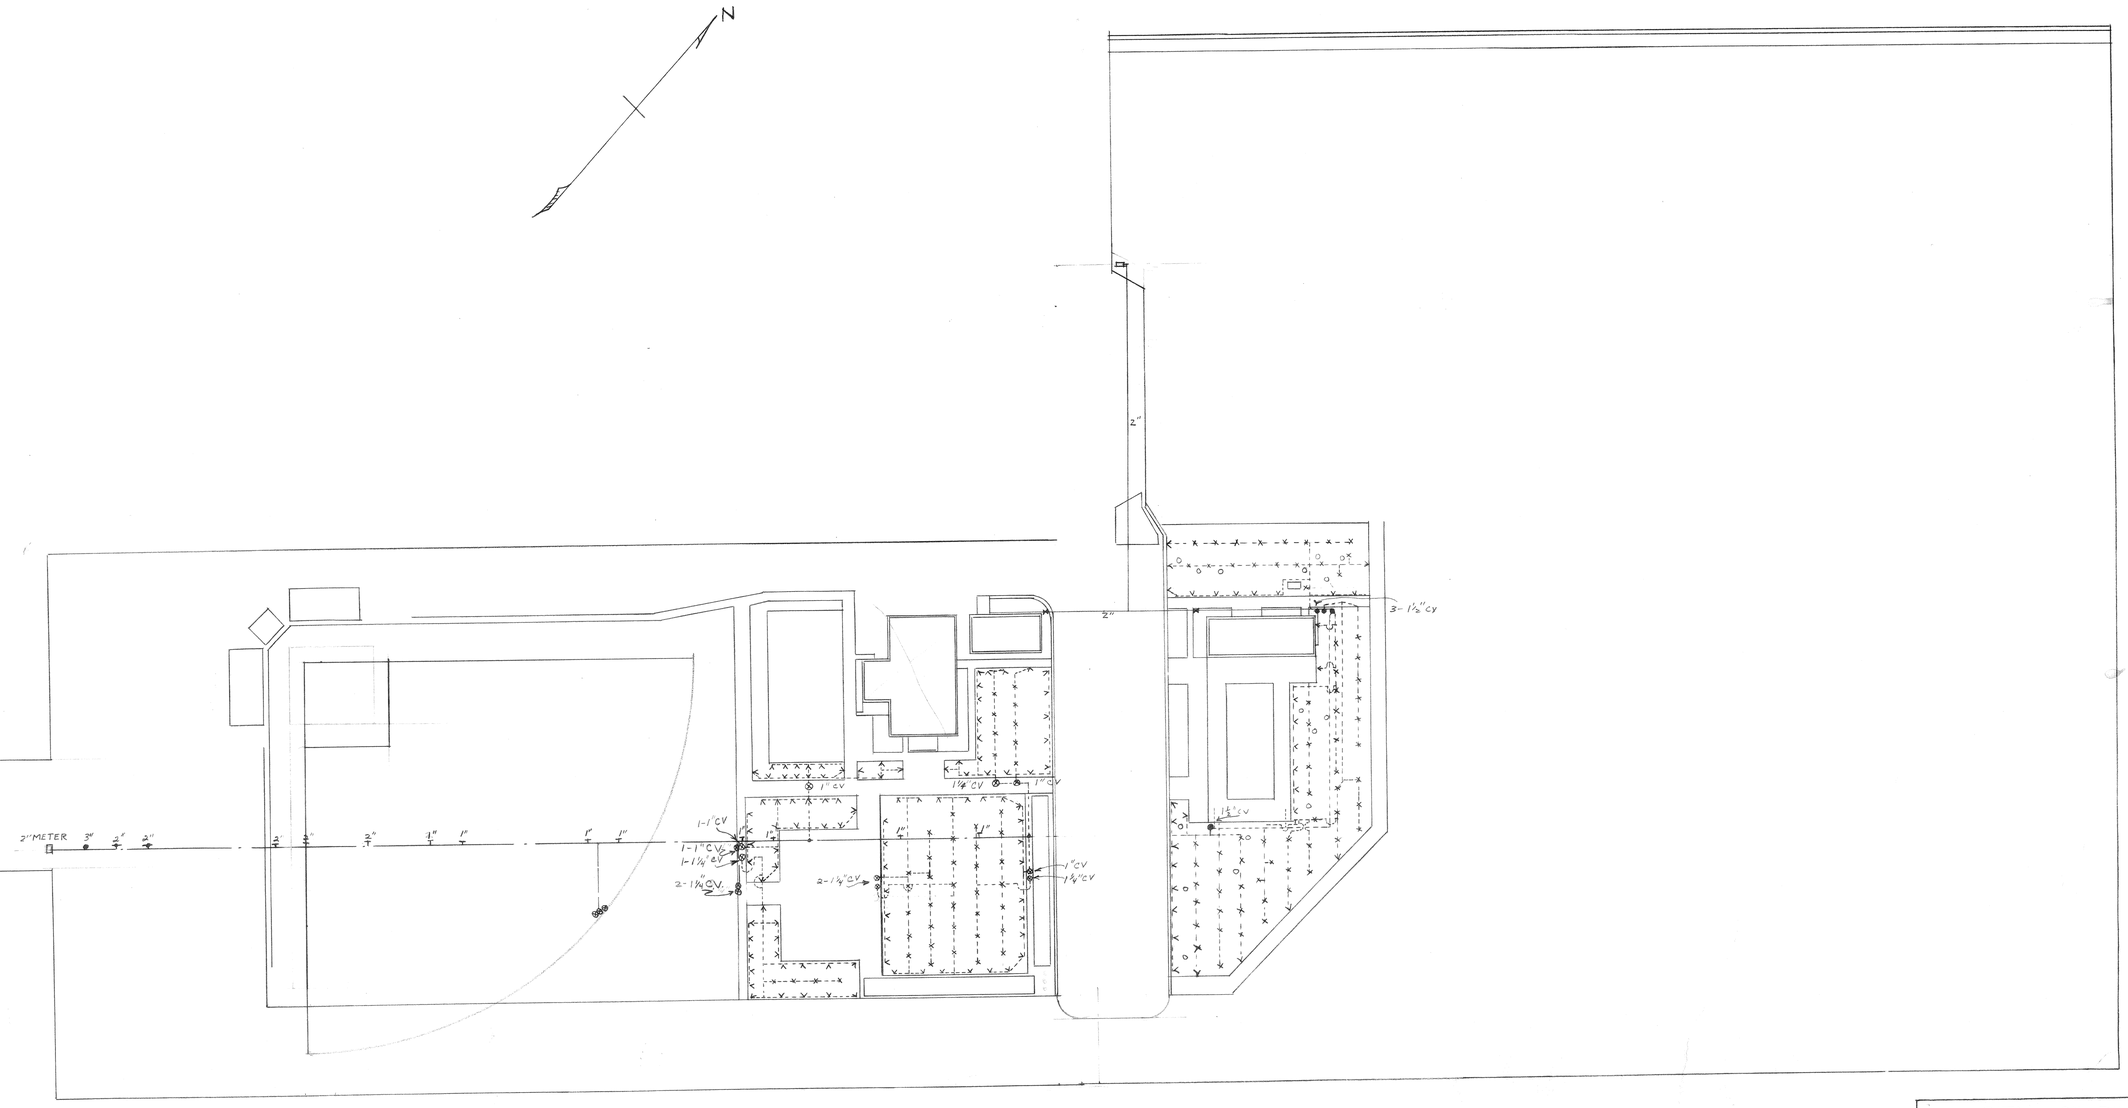


| CITY OF RIVERSIDE<br>PARK AND RECREATION DEPARTMENT | |
|---|---|
| VILLEGAS PARK<br>WATER LINES AND<br>SPRINKLER SYSTEM | |
| DRAWN BY: J.B.C. | SCALE: 1" = 40' |
| CHECKED BY: | DATE: MAY 26, 1959 |
| APPROVED BY: | |

P-159-5