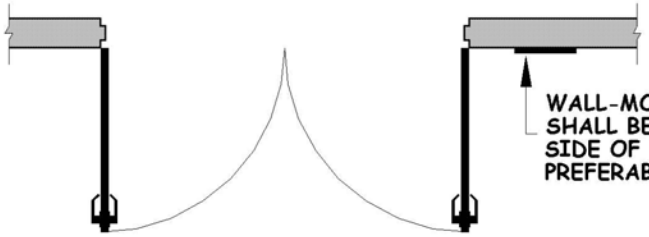

WALL SIGNAGE ADJACENT TO DOUBLE DOORS

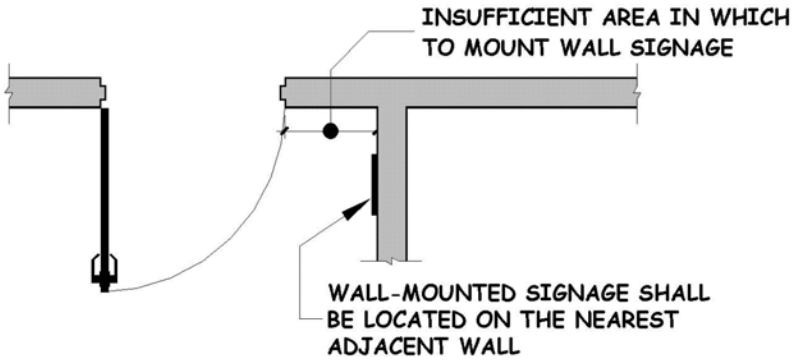

WALL SIGNAGE on ADJACENT WALL

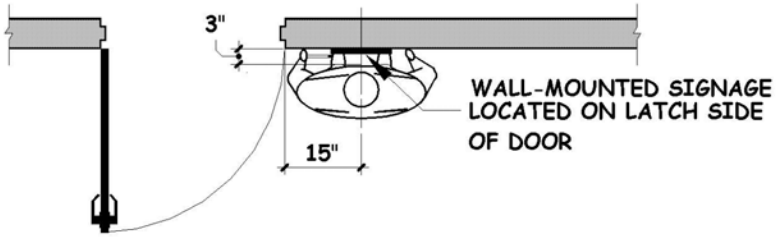

WALL SIGNAGE ADJACENT TO DOOR

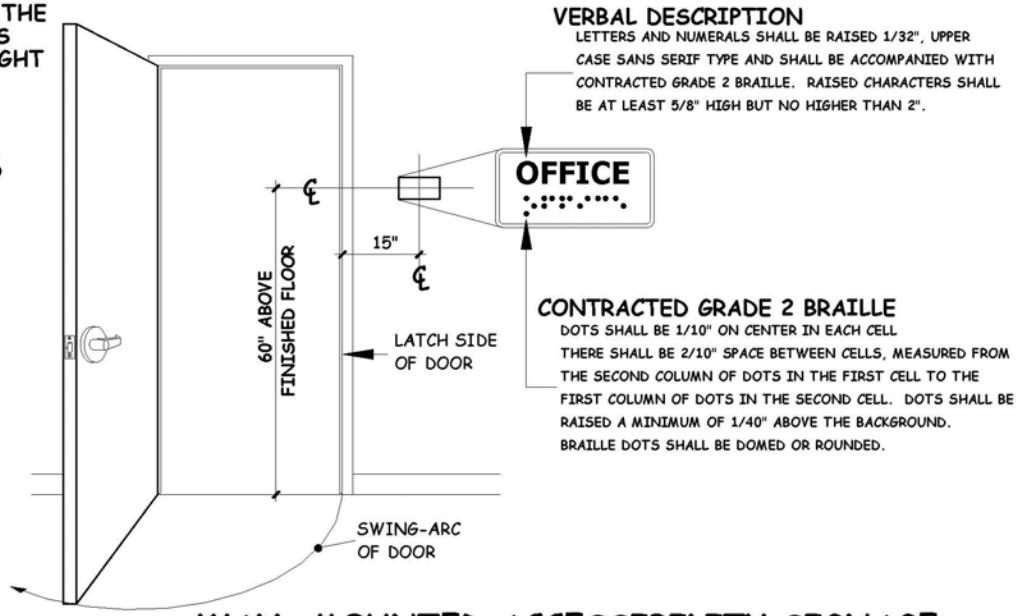

WALL-MOUNTED ACCESSIBILITY SIGNAGE

WALL-MOUNTED ACCESSIBILITY SIGNAGE SHALL CONSIST OF:

RAISED CHARACTERS IN ACCORDANCE WITH 2007 CBC SECTION 1117B.5.5.

CONTRACTED GRADE 2 BRAILLE IN ACCORDANCE WITH 2007 CBC SECTION 1117B.5.6.

WHERE PERMANENT IDENTIFICATION SIGNS ARE PROVIDED FOR ROOMS AND SPACES, SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR.

WALL-MOUNTED ACCESSIBILITY SIGNAGE MOUNTING HEIGHT SHALL BE 60" ABOVE THE FINISHED FLOOR TO THE CENTERLINE OF THE SIGN.

WHERE THERE IS NO WALL SPACE ON THE LATCH SIDE, INCLUDING DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL, PREFERABLY ON THE RIGHT.

MOUNTING LOCATION SHALL BE DETERMINED SO THAT A PERSON MAY APPROACH WITHIN 3" OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF A DOOR.
15", AS MEASURED BETWEEN THE LATCH-SIDE OF THE DOOR AND THE (VERTICAL) CENTERLINE OF THE SIGN, IS RECOMMENDED.

EXIT IDENTIFICATION SIGNAGE

CITY OF RIVERSIDE

City of Riverside
Building & Safety Division
DISABLED ACCESS STANDARDS

SCALE	NONE
DRAWN: PGH	DATE: 12 / 08

REV.	DATE	APPR.
1		
2		
3		
4		
5		

EXIT SIGNAGE

RDA - 14.0

SHEET